


RC-V4BD1TR-HD Series

4-CHANNEL DIGITALLY ENCODED
HD-CVI/TVI/AHD VIDEO WITH 1-CHANNEL
BI-DIRECTIONAL DATA TRANSCIEVER



OVERVIEW

RC-V4BD1T/R-HD Series video and data transmitter and receiver transmit four channels of 10-bit digitally encoded HD-CVI, AHD or HD-TVI video and bi-directional transmission over one core single mode or multimode fiber. Optimized optical modules which are compatible with 25/30/50/60F @720P and 25/30F@1080P ensure the highest performance for most demanding applications. The hot-pluggable and adjustment-free design ensures the convenience of the installation and operation.


APPLICATIONS

- Analog HD CCTV(PTZ Video)
- Intelligent transportation systems (ITS)
- Security and surveillance
- Access Control

FEATURES

- 10-Bit Digitally Encoded Uncompressed Transmission
- Compatible with NTSC, PAL or SECAM Video Standards
- Simultaneous Transmission of Video and Data
- Simplex or Full-duplex RS485 or RS422 Operation
- High Performance Laser-based Optics
- Plug-and-play Design with No Adjustment Required
- Local LED Indicators to Monitor System Status
- Wide Optical Dynamic Range
- No EMI, RFI, Cross Talk and Video Distortion
- Support up to 30KM
- No Video Degradation and Optical Attenuation
- Multimode or Singlemode Fiber
- Standalone or Rack Mount Options

SYSTEM DESIGN

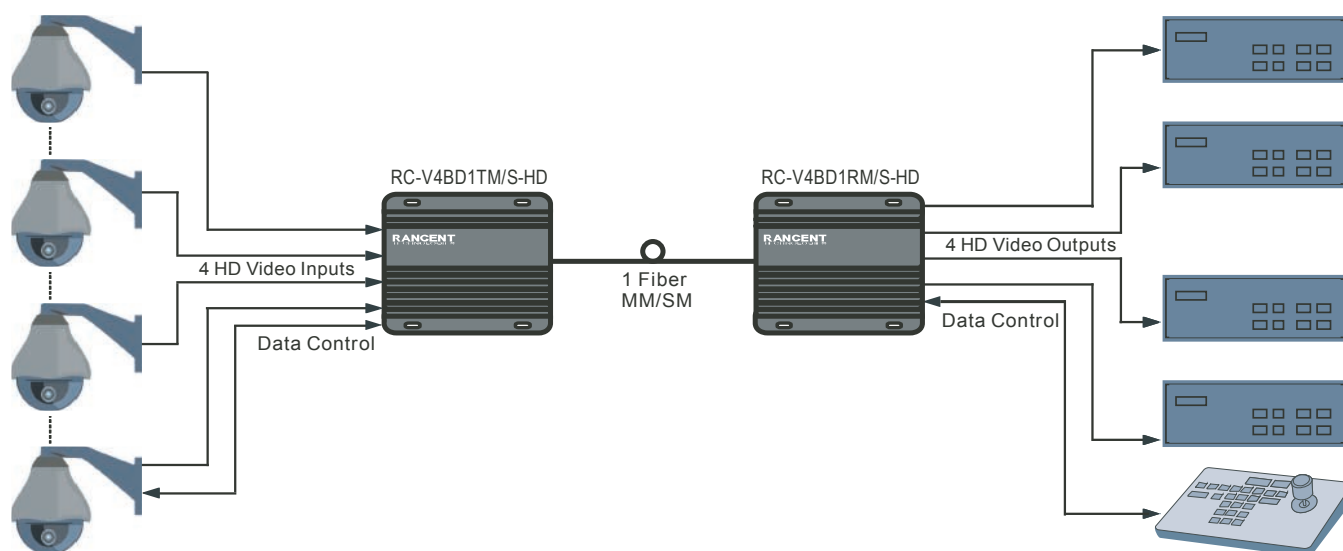

RC-V4BD1TR-HD Series

4-Channel Digital Encoded HD-CVI/TVI/AHD Video
with 1-Channel Bi-Data Transceiver

SPECIFICATIONS

Video

Video Input	1 volt pk-pk (75 ohms)
Video Voltage Range	0.6~2.0Vp-p
Video Input/Output Channels	4
Bandwidth	60 MHz
Bit Resolution	10-bit
Differential Gain	1%
Differential Phase	<1°
Tilt	< 1%
Up/down time	<0.8ns
Max. Shake	<0.2 UI
Reflection Loss	>15dB
S/N Ratio	> 60dB (Weighted))

Data

Data Protocol	RS485/RS422/RS232
Data Rate	0~300kps
Data Channels	1 (Bi-directional)
Error Rate	10

Indicating LEDs

Power Present
Video Present

Optical

Wavelength	850/1310nm, MM 1310/1550nm, SM
Optical Emitter	Laser Diode
Number of Fibers	1

Connectors

Optical	ST or SC
Video	BNC

General

Power Supply	DC5V 2A
Size	152 ×130 ×28.8mm
Construction:	Aluminum
Finish:	Paint
MTBF:	> 100,000 hours
Operating Temp	-35° C to + 65°C
Storage Temp	-40° C to +85°C

ORDING INFORMATION

Part Number	Description	Fiber	Optical PWR Budget	Max Distance
RC-V4BD1TS-HD	4 HD Video/1 Bi Data Transmitter	SM	20dB	30KM
RC-V4BD1RS-HD	4 HD Video/1 Bi Data Receiver	SM	20dB	30KM
RC-V4BD1TM-HD	4 HD Video/1 Bi Data Transmitter	MM	14dB	2KM
RC-V4BD1RM-HD	4 HD Video/1 Bi Data Receiver	MM	14dB	2KM

*Optical transmission distance is limited to optical loss of the fiber and any additional loss introduced by connectors, splices and patch panels.